



TECH NOTE NO: 3
TITLE: Load Path Map and Free Body Diagrams of Components
Assuming all Bodies are Completely Rigid
AUTHOR: Brandon Van Dyk
ATTENDANCE: Justin Grassé, Ryan Kernes, Chris Rapp, Amogh Shurpali,
Brandon Van Dyk, Sihang Wei
CONTACT: University of Illinois, Dept. of Civil & Environmental Engineering
B118 Newmark Civil Engineering Laboratory, MC-250
205 North Mathews Avenue
Urbana, IL 61801
Ph: (217) - 244-6063
Email: vandyk2@illinois.edu
DATE/REV: 10/4/12

1. Introduction

This technical note summarizes the results of an extensive discussion focused on the load path mapping and free body diagrams of individual components for a concrete crosstie fastening system, hereafter referred to as “Tech Note 3”. The discussion proceeded and was completed on the basis of several assumptions, most notably, that all components act as completely rigid bodies. This discussion produced a complete load path map (with component free body diagrams) from the head of the rail, through the fastening system, to the concrete crosstie (**Figure 1**).

2. Objectives

- a. Understand the demands placed on the concrete crosstie and selected fastening system components
- b. Develop a load path map, under static loading, of the concrete crosstie and selected fastening system from the top of the rail head to the bottom of the crosstie
- c. Identify and classify all forces acting on each component and internal forces within each component

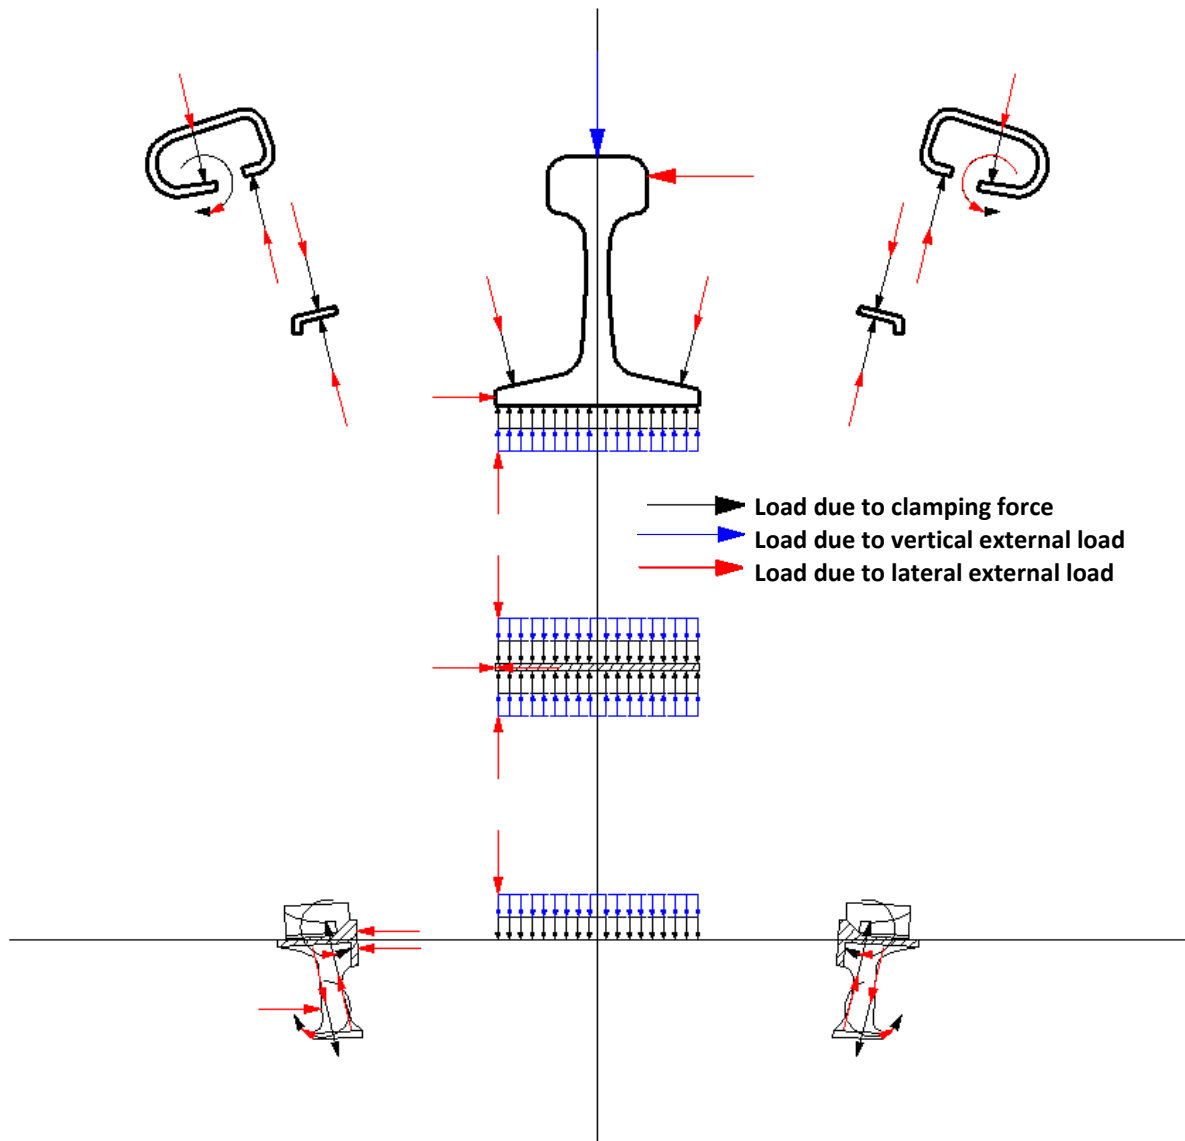


Figure 1 – Load Path Map and Component Free Body Diagram

3. Assumptions

The following assumptions were made to aid in the development of the load path map and component free body diagrams for this condition:

- a. Neglect system and component deflections (i.e. components idealized as rigid bodies)
- b. Neglect self-weight of each component
- c. Fastening system consists of a single pad, two insulators, and two elastic clips (similar to the Safelok I)
- d. The clip is driven and all fastening systems components are correctly installed


- e. Axis orientation is as follows:
 - i. Z-axis is normal to the inclination of the rail seat
 - ii. X-axis is parallel to the inclination of the rail seat
 - iii. Y-axis is parallel to the longitudinal direction of the rail
- f. Neglect tangential forces; where they are necessary, substitute moments

4. Discussion

After accepting these assumptions, discussion moved to creating load path maps of the selected fastening system. To simplify the procedure and allow for a better understanding of individual loading, this process was separated into three distinct load cases:

- a. Clamping force only
- b. Vertical external load only
- c. Horizontal external load only
- d. Summation of loads due to cases (a), (b), and (c)

Case (a) includes the forces within the fastening system due to the clamping force exerted by the driven clip (**Figure 2**). Case (b) includes the forces within the fastening system that can be attributed to a purely vertical external load applied to the rail head (**Figure 3**). Case (c) includes the forces within the fastening system that exist due to a purely horizontal load applied to the rail head (**Figure 4**).

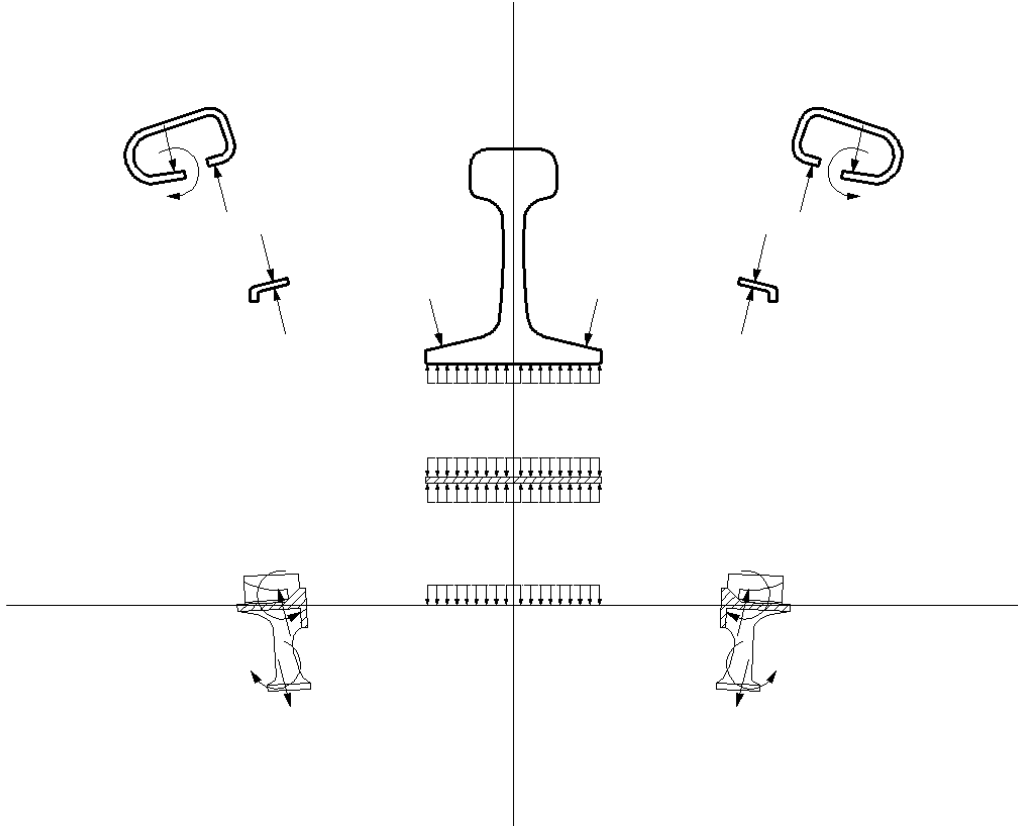

**Figure 2 – Concrete Crosstie Fastening System Load Path Map and Component Free Body Diagram:
Forces due to Clamping Force**

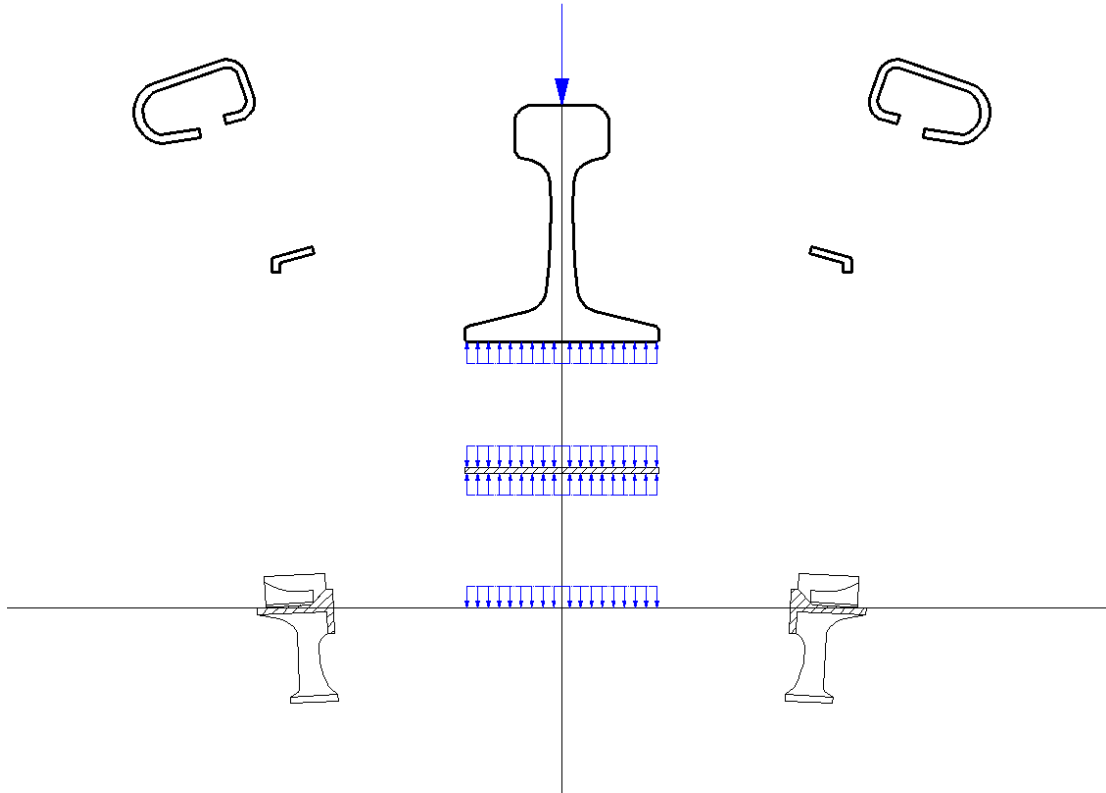


Figure 3 – Concrete Crosstie Fastening System Load Path Map and Component Free Body Diagram: Forces due to Vertical External Load

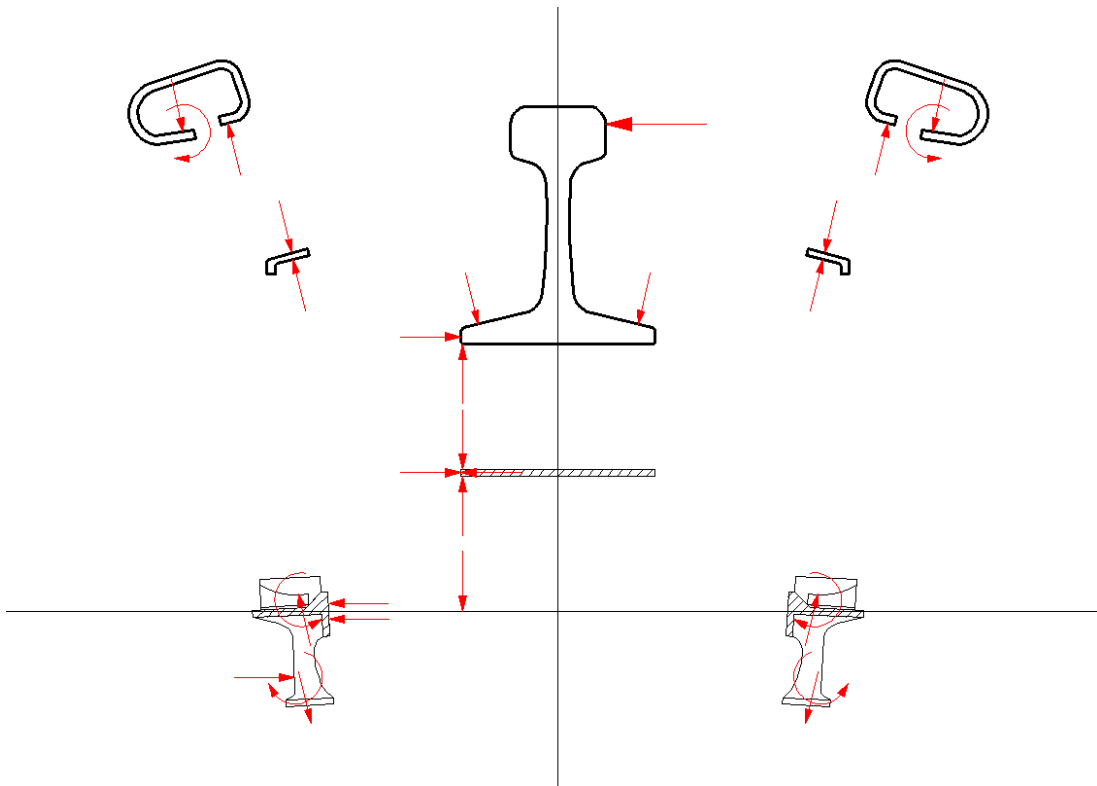


Figure 4 – Concrete Crosstie Fastening System Load Path Map and Component Free Body Diagram: Forces due to Lateral External Load

To complete the load path map and component free body diagrams, all three load cases were combined using the concept of superposition. This combination adequately models the field conditions of the fastening system. Where forces from multiple load cases exist at the same location, they were represented by superimposed forces of different colors, creating a clear representation of all forces acting externally on each component. See **Figure 1** for this result.

5. Final Remarks

The completion of this load path map is a tremendous step toward understanding the demands on each component and achieving all the objectives. The next step to be executed is to remove the assumption that all bodies act rigidly, considering deflection in the individual components when developing the free body diagrams.